



USB  
COM port  
MODBUS-RTU

Software  
ARsoft-CFG

Password  
protection

- possibility of testing measuring devices and temperature sensors
- universal input/output:
  - thermoresistive Pt100, Ni100 (resolution 1Ω)
  - thermoelectric J, K, S, B, R, T, E, N
  - linear: voltage (mV), resistive (Ω - resolution 1Ω)
- ergonomic hand housing of small dimensions and weight with rubberized non-slip side handles, simple and reliable to use laboratory banana connectors, functional keyboard, standard battery power supply (2x1,5V) or accumulators 2x1,2V NiMH, NiCd, AA type (R6)
- long operating time on new alkaline batteries or fully charged rechargeable batteries
- USB interface (micro-USB type B) for programming configuration and viewing measurements (ARsoft-CFG), enabling power supply from an external power supply or battery power bank
- intuitive operation, easy configuration and clear indication of device operating states
- two-rows, easy-to-read LCD display with icons and measurement units, showing sensor type, set/measured values, battery level and other diagnostic messages
- signalling the IN/OUT operating mode with pulsating LED diodes
- F button for quick selection of one of the programmed functions: quick change of sensor type, keyboard lock, freezing of measurements (HOLD), preview of the reference cold junction temperature
- free software (for Windows 7/8/10) available enabling configuration and copying of device parameters, with the option of updating from the website (ARsoft-CFG)
- programmable password protection for access to configuration parameters
- high resistance to interference occurring in industrial environments


#### TECHNICAL DATA

Input/Output	Measur. range	Input/Output	Measur. range
Pt100 (RTD)	-100÷850°C	thermocouple R (PtRh13-Pt)	-40÷160°C
Ni100 (RTD)	-50÷170°C	thermocouple T (Cu-CuNi)	-25÷350°C
thermocouple J (Fe-CuNi)	-40÷800°C	thermocouple E (NiCr, CuNi)	-50÷750°C
thermocouple K (NiCr-NiAl)	-40÷1200°C	thermocouple N (NiCrSi-NiSi)	-80÷1300°C
thermocouple S (PtRh10-Pt)	-40÷1600°C	voltage	-5÷60mV
thermocouple B (PtRh30-PtRh6)	300÷1800°C	resistance	20÷5400Ω (IN), 20÷3200Ω (OUT)
<b>Lead resistance for RTD</b>		$R_d < 25\Omega$ (for each line)	
<b>Resistive input/output current (RTD, Ω)</b>		$\sim 250\mu\text{A}$ (for measurements), max. 1mA (for setting)	
<b>Processing primary error</b> (at 25°C ambient temperature)		measurement: $\leq 0,3\%$ of measurement range $\pm 1$ digit	
setting: $\leq 0,3\%$ of measurement range $\pm 1$ digit			
<b>Additional error (non-linearity)</b>		$\leq 0,5^\circ\text{C}$ ( $\leq 0,20$ for resistance measurement and setting)	
<b>Additional error (thermocouple input/output)</b>		$\leq 2^\circ\text{C}$ (only with automatic thermocouple cold junction temperature compensation function active)	
<b>Additional error from temperature changes</b>		$\leq 0,01\%$ of sensor range / °C	
<b>Indication resolution (programmable)</b>		0,1 or 1 (1Ω for resistance setting)	
<b>Setting resolution (programmable)</b>		0,5÷200 (min. 2,6°C for Pt100, 1,8°C for Ni100, 1,0Ω for res.)	
<b>Response time for measurements (10÷90%)</b>		0,5÷3,5s (programmable filtration degree, default 1,5s)	
<b>Power supply</b> (batteries or accumulators)		2x1,5V or 2x1,2V NiMH, type AA (R6)	
<b>Operating time</b> (for 2500mAh alkaline batteries)		300÷500 hours (depending on operating mode and load)	
<b>Communication interface (MODBUS-RTU)</b>		USB (micro B connector), drivers for Windows 7/8/10	
<b>Rated operating conditions</b>		0÷50°C, <90%RH (without condensation)	
<b>Weight</b>		$\sim 140\text{g}$ ( $\sim 190\text{g}$ with batteries, included in set)	
<b>Protection degree</b>		IP43 (IP20 from connectors side)	
<b>Electromagnetic compatibility (EMC)</b>		resistance: according to PN-EN 61000-6-2 emmissivity: according to PN-EN 61000-6-4	



#### HOUSING

**DIMENSIONS** (height, width, depth) 136 x 80 x 25mm

**MATERIAL** ABS

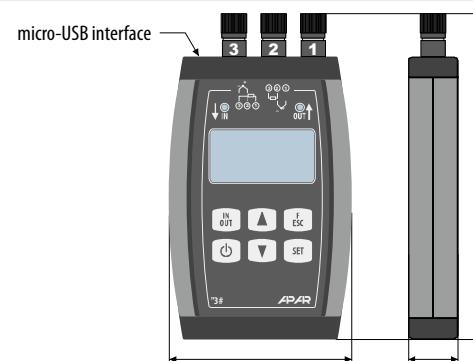

#### CONNECTIONS, VIEW FROM TOP

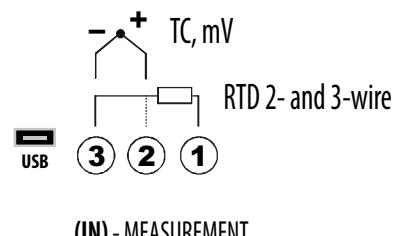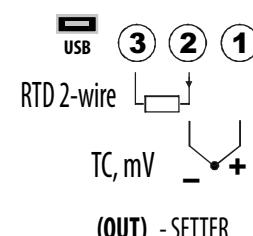

#### Content of set:

- device with 2 batteries 1,5V type AA (R6) and measuring wires
- storage case
- user manual

#### Ordering procedure

AR915.B