

N100 POWER NETWORK ANALYZER

FEATURES:

INPUTS:


OUTPUTS:

GALVANIC ISOLATION:


Succesor of the reliable meter N10
NEW!



- Measurement of power network parameters in 3 or 4-wire, balanced or unbalanced systems.
- Two-color LED display (red, green).
- Four quadrant energy measurement.
- Indications taking into consideration programmed ratio values.
- Storage of minimal and maximal values.
- Backlit units of all measured quantities.
- Programmable number of pages and selection of displayed quantities on each of the 20 pages.
- Configurable analog and alarm outputs.
- Pulse output to control of the consumption of active energy (option).
- Pulse input to count the consumption of active energy from external counter.
- Digital RS-485 interface with MODBUS protocol.
- Archiving data in the internal memory file system memory 8 GB (option).
- Ethernet interface 10/100 BASE-T (option)
 - protocol: MODBUS TCP/IP, HTTP, FTP,
 - services: www server, ftp server, DHCP client
- Battery support of RTC.

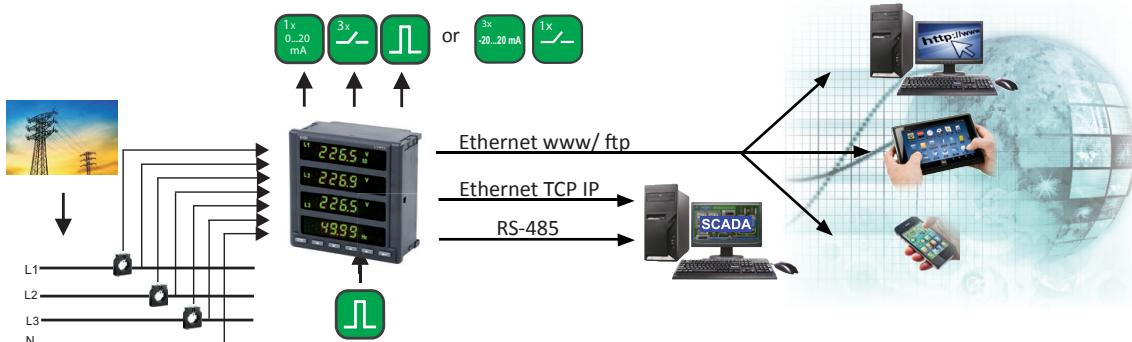EXAMPLE OF APPLICATION

MEASUREMENT OF POWER NETWORK PARAMETERS

- | | |
|--|---|
| • phase voltages U_1, U_2, U_3
• phase-to-phase voltages U_{12}, U_{23}, U_{31}
• phase currents I_1, I_2, I_3
• phase active powers P_1, P_2, P_3
• phase reactive powers Q_1, Q_2, Q_3
• phase apparent powers S_1, S_2, S_3
• phase active power factors $\text{Pf}_1, \text{Pf}_2, \text{Pf}_3$
• phase reactive /to active power factors $\text{tg}\varphi_1, \text{tg}\varphi_2, \text{tg}\varphi_3$
• active, reactive and apparent 3-phase power P, Q, S
• 3-phase active, reactive and apparent powers $\text{Pf}, \text{tg}\varphi$
• frequency f
• average 3-phase voltage U_s | • average phase-to-phase voltage U_{mf}
• average 3-phase current I_s
• average active power e.g. 15 min. P_{demand}
• average apparent power S_{demand}
• average current I_{demand}
• 3-phase active, reactive and apparent energy $\text{EnP}, \text{EnQ}, \text{EnS}$
• active energy from external counter EnPE ,
• total harmonic distortion factors for phase voltages and phase currents $\text{THD}_{u_1}, \text{THD}_{u_2}, \text{THD}_{u_3}, \text{THD}_{i_1}, \text{THD}_{i_2}, \text{THD}_{i_3}$ and for 3-phase voltage and 3-phase current $\text{THD}_v, \text{THD}_i$
• harmonics of phase voltages and currents – up to the 51st |
|--|---|

OUTPUTS

Output type	Properties
Analog output	1 output: 0...20 mA (4...20 mA) programmable or 3 outputs -20..0..20 mA programmable, depending on version. Basic errors 0.2%.
Relay output	3 or 1 relay programmable depending on version, voltageless NO contact, load capacity 250 V a.c./ 0.5 A a.c.
Active energy impulse output	1 OC (NPN), passive, supply voltage 18..27 V, (for version with 3 relay outputs, 1 analog output). Accuracy, as for the active energy.

INPUTS

Input type	Properties
Passive pulse input	0/12...36 V d.c. (for version with 3 relay outputs, 1 analog output)

DIGITAL INTERFACE

Type of interface	Transmission protocol	Remarks
RS-485	Modbus RTU 8N2,8E1,8O1,8N1 address 1..247	baud rate: 4.8, 9.6, 19.2 38.4, 57.6, 115.2 kbit/s
Ethernet 10/100 Base-T	Modbus TCP,HTTP,FTP	WWW server, FTP server, DHCP client

MEASURED PARAMETERS AND MEASURING RANGES

Measured value	Measuring range	L1	L2	L3	Σ	Class (*) / Basic error (*) class relative to the measured value acc. to EN61557-12
Current 1/5 A 1 A~ 5 A~	0.010 .. 0.100 .. 1.200 A (tr_I=1) 0.050 .. 0.500 .. 6.000 A (tr_I=1) ... 20.00 kA (tr_I ≠ 1)	•	•	•		Class 0.2
Voltage L-N 57.7 V~ 230 V~ 400 V~	5.7 .. 11.5 .. 70.0 V (tr_U=1) 23.0 .. 46 .. 276.0 V (tr_U=1) 40.0 .. 80 .. 480.0 V (tr_U=1) ... 480.0 kV (tr_U ≠ 1)	•	•	•		Class 0.2
Voltage L-L 100 V~ 400 V~ 690 V~	10.0 .. 20 .. 120.0 V (tr_U=1) 40.0 .. 80 .. 480.0 V (tr_U=1) 69.0 .. 138 .. 830.0 V (tr_U=1) ... 830.0 kV (tr_U ≠ 1)	•	•	•		Class 0.5
Active power P _a , average active power P _{dt}	.. (-)1999.9 W .. (-)1999.9 MW (tr_U ≠ 1, tr_I ≠ 1)	•	•	•	•	Class 0.5
Reactive power Q _i	.. (-)1999.9 Var .. (-)1999.9 MVar (tr_U ≠ 1, tr_I ≠ 1)	•	•	•	•	Class 2
Apparent power S _a , average apparent power S _{dt}	.. 1999.9 VA .. 1999.9 MVA (tr_U ≠ 1, tr_I ≠ 1)	•	•	•	•	Class 0.5
Active energy EnP (imported or exported)	.. (-)1999.9 Wh .. (-)1999.9 MWh (tr_U ≠ 1, tr_I ≠ 1)				•	Class 0.5
Reactive energy EnQ (inductive or capacitive)	.. (-)1999.9 Varh .. (-)1999.9 MVarh (tr_U ≠ 1, tr_I ≠ 1)				•	Class 2
Apparent energy EnS	.. 1999.9 VAh .. 1999.9 MVAh (tr_U ≠ 1, tr_I ≠ 1)				•	Class 0.5
Active power factor PF _i	-1.00 .. 0 .. 1.00	•	•	•	•	±0.01 of basic error
Coefficient tgφ _i (ratio of reactive power to active power)	-1.20 .. 0 .. 1.20	•	•	•	•	±0.01 of basic error
Frequency f	45.00 .. 65.00 Hz	•	•	•	•	Class 0.2
Total harmonic distortion of voltage THDU, THDI	0.0 .. 100.0 %					Class 5 50/60 Hz
Amplitudes of the voltage U _{h1} .. U _{h50} , and current I _{h1} .. I _{h50} harmonics	0.0 .. 100.0 %	•	•	•		Class 5 50/60 Hz

tr_I, tr_U – ratio of current, voltage transformer

SEE ALSO:



Current transformers
from 5 A
up to 6 kA



N43 - Rail mounted
3-phase power
network meter



P43 - 3-phase
transducer
of power network
parameters

EXTERNAL FEATURES

Readout field	4 x 4 1/2 LED digits, backlit units	two-color (red, green), 14 mm
Overall dimensions	144 x 144 x 77 mm	panel cut-out: 138 ^{+0.5} x 138 ^{+0.5} mm
Weight	0.8 kg	
Protection grade	from frontal side: IP40	from terminal side: IP20

RATED OPERATING CONDITIONS

Supply voltage	85 .. 253 V a.c. (40 .. 400 Hz) or 90 .. 300 V d.c.	power input ≤ 12 VA
Power consumption	in voltage circuit ≤ 0.5 VA	in current circuit ≤ 0.1 VA
Input signal	0 ... 0.1 ... 1.2 In; 0.1 ... 0.2 ... 1.2 Un for current, voltage, Pf, tgφ _i	• frequency 45 .. 50 .. 60 .. 65 Hz, • sinusoidal signal (THD ≤ 8%)
Power factor	-1 ... 0 ... 1	
Preheating time	5 min.	
Temperature	-10 .. 23 .. 55°C, class K55 acc. to EN61557-12	
Humidity	0 ... 40 .. 65 .. 95%	inadmissible condensation
Operating positions	any	
External magnetic field	≤ 40 .. 400 A/m d.c.	≤ 3 A/m a.c. 50/60 Hz
Short duration overload	voltage input: 2 Un (5 sec.)	current input: 50 A (1 sec.)
Admissible crest factor	current: 2	voltage: 2
Additional error (in % of the intrinsic error)		from ambient temperature changes: < 50% / 10°C

SAFETY AND COMPABILITY REQUIREMENTS

Electromagnetic compatibility	noise immunity noise emissions	acc.to EN 61000-6-2 acc.to EN 61000-6-4
Isolation insured by the casing	double	
Isolation between circuits	basic	
Polution level	2	
Installation category	III	acc. to EN 61010-1
Maximal phase-to-earth voltage	• for supply circuit and relay outputs: 300 V • for measuring input: 500 V • for circuit of RS-485, Ethernt, pulse input and output, analog outputs: 50 V	
Altitude a.s.l.	< 2000 m	

N100 POWER NETWORK ANALYZER

SEE ALSO:




Free eCon
software




ND1 - Analyser
of network
parameters


CONNECTION DIAGRAMS

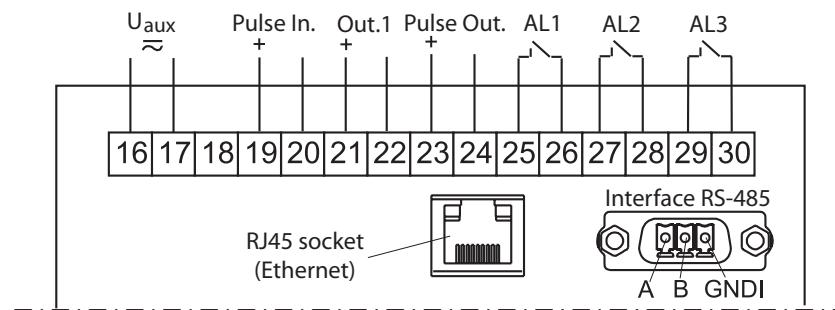

Version with 3 relay outputs, 1 analog output

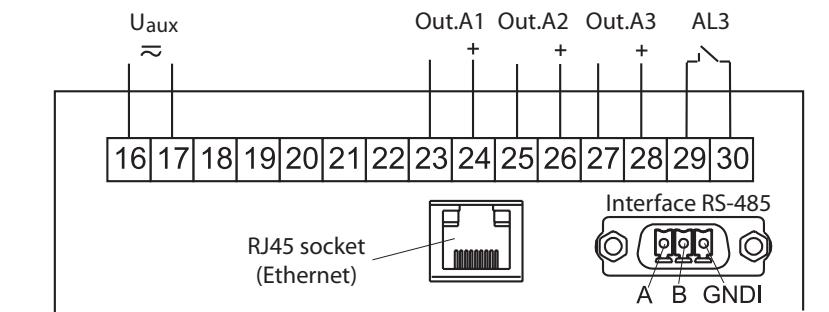

Version with 3 analog outputs, 1 relay output

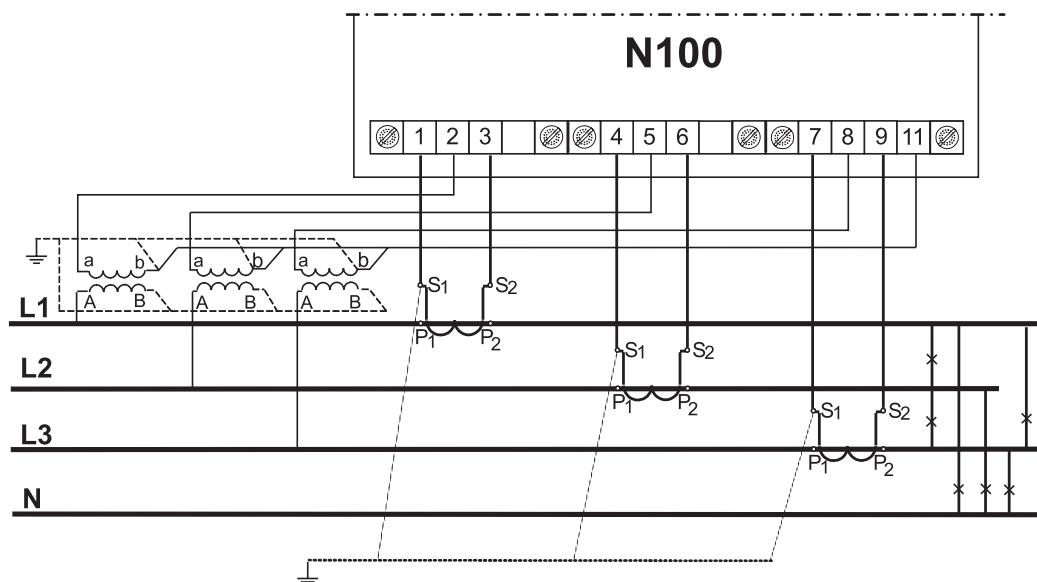

Indirect measurement in a four-wire network – connection of input signals

ORDERING

ORDERING CODE						
Meter N100 -	X	X	X	XX	X	X
Input voltage (phase/phase-to-phase) Un:						
3 x 57.7 / 100 V	1					
3 x 230 / 400 V	2					
3 x 400 / 690 V	3					
Outputs:						
3 x relay, 1 x analog, 1x pulse input, 1 x pulse output	1					
3 x analog, 1 x relay	2					
Additional equipment:						
without Ethernet interface	0					
with Ethernet interface, internal memory	1					
Version:						
standard	00					
custom-made*	XX					
Language:			P			
Polish			E			
English			X			
other*						
Acceptance tests:			0			
without additional quality requirements			1			
with an extra quality inspection certificate			X			
acc.to customer's request*						

* only after agreeing with the manufacturer

N100 meter has in standard:

- universal current input 1/ 5 A,
- interface RS-485,
- supply 85...253 V a.c. (40...400 Hz) or 90...300 V d.c.

Notice:

- for output version: 3 x relay, 1 x analog output, 1 x pulse input, 1 x pulse output – the analog output has the range of 0...20 mA.
- for output version: 3 x analog output, 1 x relay – the analog outputs have the range of -20.0..20 mA.
- For both version the analog outputs are programmable.

Order example:

The code: **N100 - 2 1 1 00 E 0** means:

- N100** - N100 meter,
- 2** - input voltage 3 x 230/400 V,
- 1** - 3 x relay, 1 x analog, 1x pulse input, 1 x pulse output
- 1** - with Ethernet, internal memory,
- 00** - standard version,
- E** - english version,
- 0** - without additional quality requirements.

SEE ALSO:



RE92- dual loop controller



P30U- universal transducer of temperature and standard signals



KS31 - Digital synchronizing unit

HISPACONTROL 
INSTRUMENTACION INDUSTRIAL
HISPACONTROL S.L.
 Paseo Delicias 65 Bis, 1D
 28045 Madrid
 Tel. 915 308 552
hc@hispacontrol.com
www.hispacontrol.com