

# Level switches ERH-xx-20

## Description

Level signalling of the medium having minimum density 0,70 g/cm<sup>3</sup>. The basic version, mounted from the top, is available with 92x92mm flange connector, head made from aluminium alloy and M20x1,5 cable gland with casing protection degree IP68. Other versions of mechanic or threaded flange connectors - according to the ordering code. There is also a possibility of ordering the level switch with connector according to the requirements, e. g. with flange acc. to DIN or ANSI standard. The level switch can also be ordered in version fully made from acidproof steel, with additional cover protecting the float, as well as with certified cable of optional length.

## Technical data

Min. medium density	0,70 g/cm <sup>3</sup>
Max. process pressure	1,0 MPa
Ambient temperature *	-25...+80°C
Medium temperature *	-25...+150°C
Switching points	1, 2 or 3
Switching rate **	230 V AC; 100VA; 1A 230 V DC; 50W; 0,5A
Hysteresis	10mm
Ingress Protection	IP68
Type of temperature sensor	Pt100
Explosion-proof	Ex II 2G Ex db IIC T3÷T6 Gb
Material of <i>the wet part</i>	acidproof steel 316L
Material of <i>the dry part</i>	aluminium alloy or 316SS
Floating element	40x35mm
Protection tube	60
Weight of the level switch ***	0,3...8,5 kg
Weight of the cable	0,15 kg/mb



## Temperatures for Ex version


Class	Ambient temp.	Medium temp.
T6	-25...+60°C	-25...+85°C
T5	-25...+65°C	-25...+100°C
T4	-25...+80°C	-25...+135°C
T3	-25...+80°C	-25...+150°C

\* temperatures for Ex version in the table

\*\* maximum parameters of the reed relays apply to the loads of resistance character; for inductive loads such as relay coils, one should apply adequate protecting systems (detailed pieces of information in Operation Manual)

\*\*\* it depends on the version

## Design

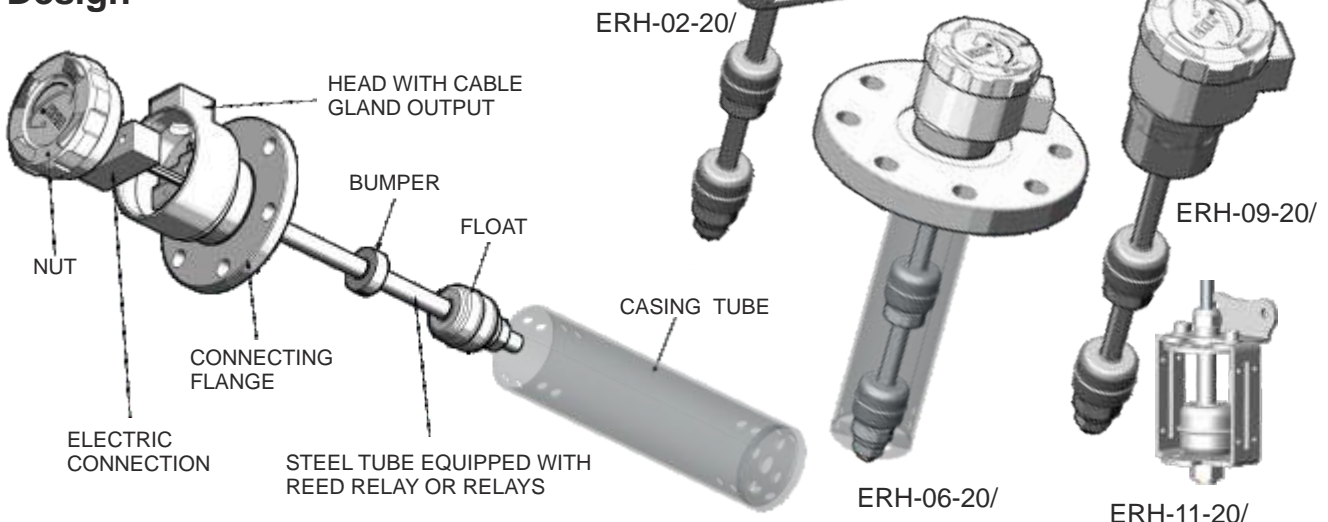


## Examples of level switches





HISPACONTROL S.L.  
 P<sup>o</sup> Delicias 65 Bis  
 28045 Madrid  
 Tel. 915 308 552  
[hc@hispacontrol.com](mailto:hc@hispacontrol.com)  
[www.hispacontrol.com](http://www.hispacontrol.com)

**Dimensions**

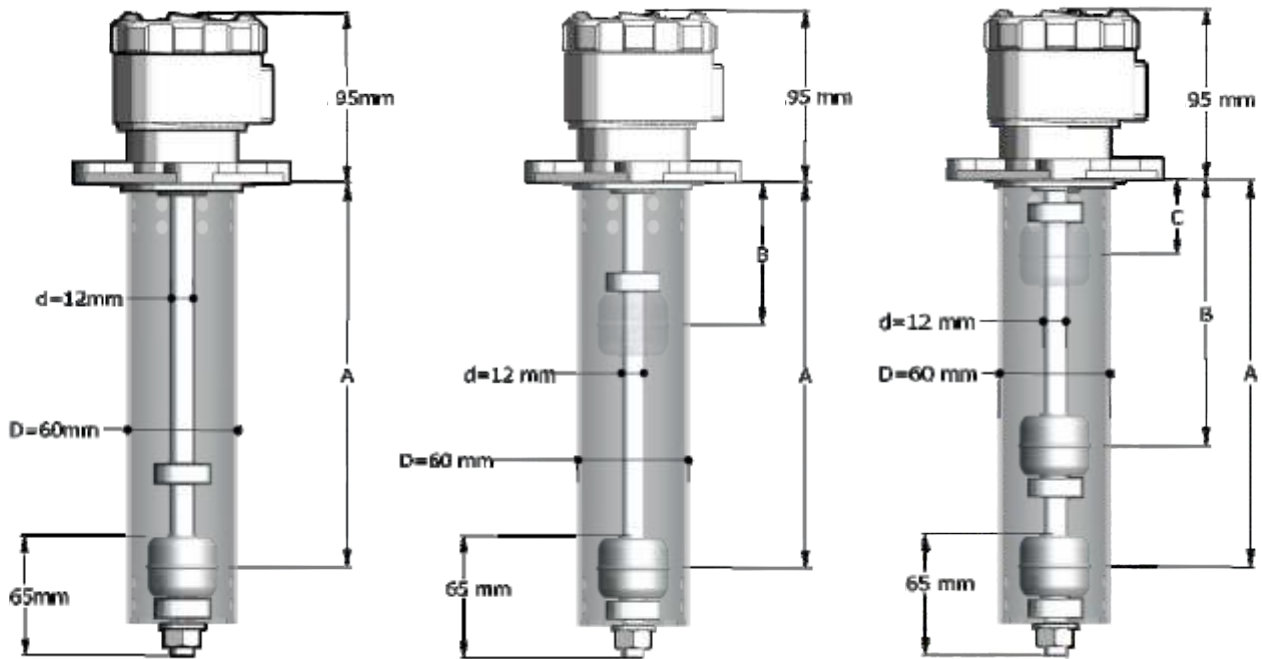

The dimensions A, B and C depend on the ordered version. For one signalling point: A min. 50mm, A max. 1000mm. For two signalling points: A min. 150mm, A max 1000mm; B min. 50mm, B max 900mm; (A – B) min. 100mm. For three signalling points: A min. 250mm, A max 1000mm; B min. 150mm, B max 900mm; C min. 50mm, C max 800mm; (A–B) min. 100mm, (B–C) min. 100mm.

**Dimensions of flange connectors**

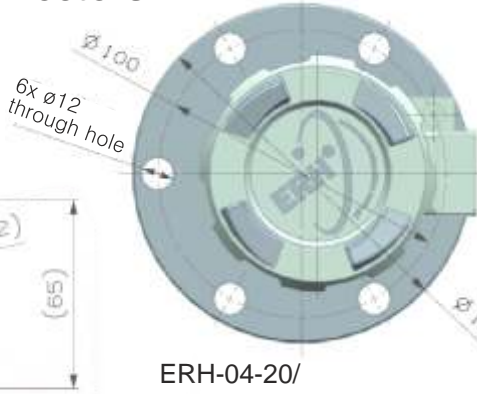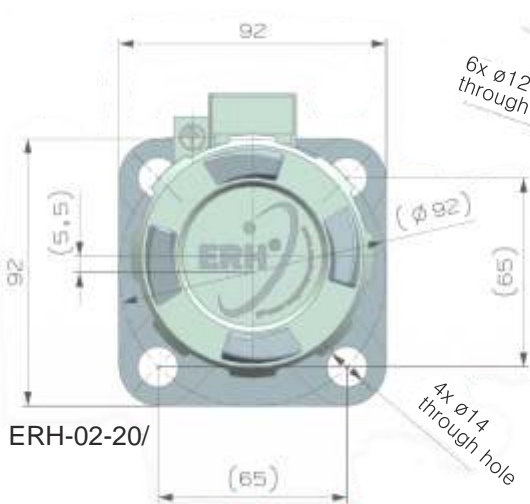


ERH-04-20/


**Electric connectors**

The level switch can be equipped with special gland, marked ER2-1593, which gives possibility of mounting the casing tube of cable (it is not the equipment element). In such version the controller can be ordered exclusively with cable.

Gland from the side of head M20x1,5 thread  
Conical thread 3/4" for mounting of cable casing tube



Electric connector ER2-1593

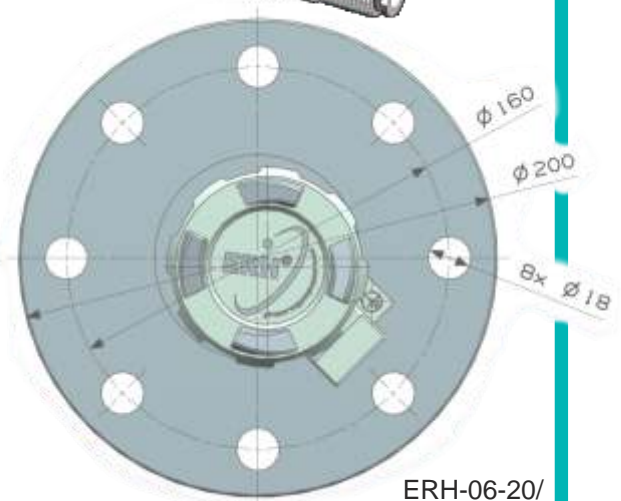

ERH-06-20/

**Flanges for special version \***

Flange marking	Outside diameter	Number of holes	Hole diameter	Spacing of holes
CON-14/340	130mm	4	15mm	105mm
CON-14/346	160mm	4	14mm	130mm
CON-14/290	170mm	8	14mm	138mm
CON-14/347	190mm	4	18mm	150mm
CON-14/348	220mm	8	18mm	180mm


\* other versions of flanges after mutual agreement

## Electric diagram

### One switching point (one float)

The diagram shows state of reed relay at minimum level of medium – magnetic field of the float interacts the reed relay.

Reed relay without activation of magnetic field of the float at so-called normal state is configured as normally open NO.

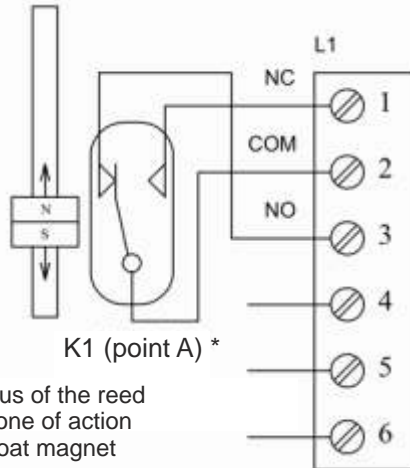

\* the status of the reed in the zone of action of the float magnet

### Three switching points (two floats) \*


The diagram shows state of reed relays at minimum level of medium - magnetic fields of the float interact the reed relays K2 and K3.

Reed relays without activation of magnetic field of the float at so-called normal state are configured as:

K1 - normally open NO

K2 - normally closed NC

K3 - normally closed NC

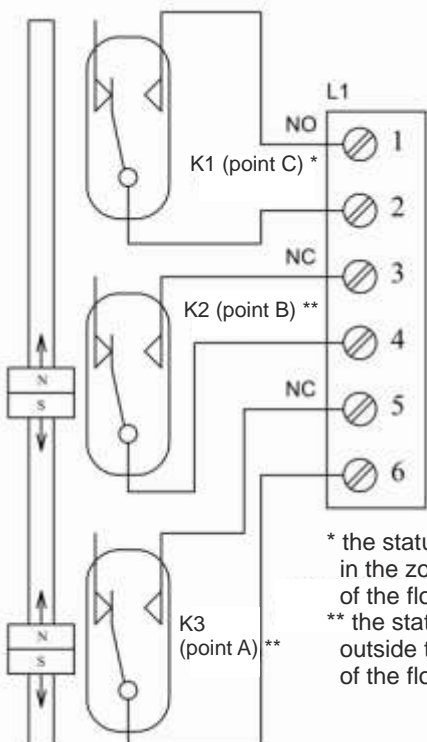

\* the status of the reed in the zone of action of the float magnet

\*\* the status of the reed outside the operation of the float magnet


### Two switching point (one float)\*

The diagram shows state of reed relays at minimum level of medium - magnetic fields of the float interact the reed relay K2.

Reed relays without activation of magnetic field of the float at so-called normal state are configured as:

K1 - normally open NO


K2 - normally closed NC

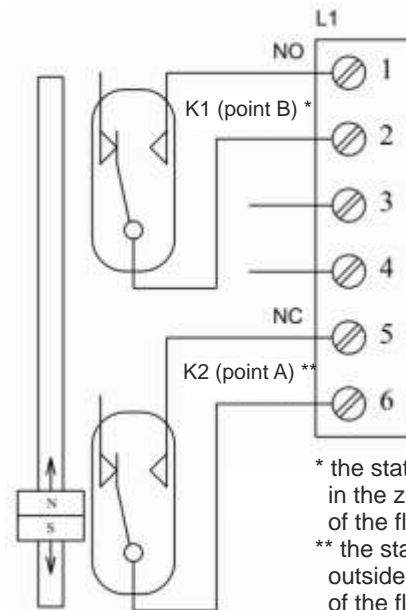

\* the status of the reed in the zone of action of the float magnet

\*\* the status of the reed outside the operation of the float magnet

### Option with temperature sensor Pt100

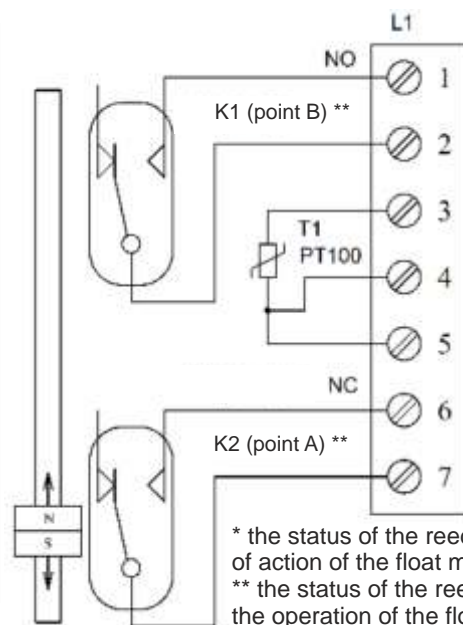

\* the status of the reed in the zone of action of the float magnet

\*\* the status of the reed outside the operation of the float magnet

**\* there is a possibility of other than given configurations of leadouts – after agreement**


# Magnetic level switch with mounting clamp in mini version

## Features of level switch in mini version:


- Realized functions: close, open, switched
- Switching point - approximately in the middle of tube length
- Fully made from acidproof steel
- Possibility of easy mounting, e. g. by means of mounting clamp (2" clamp is attached to the complete set)

## Electric diagram




(Standard: cable 3m; 0,75mm<sup>2</sup>x3)

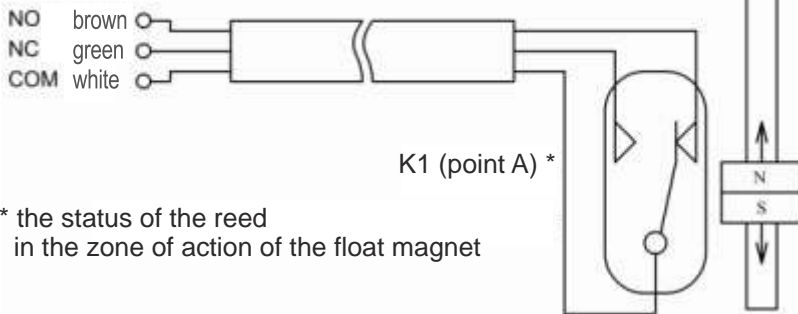

## Dimensions

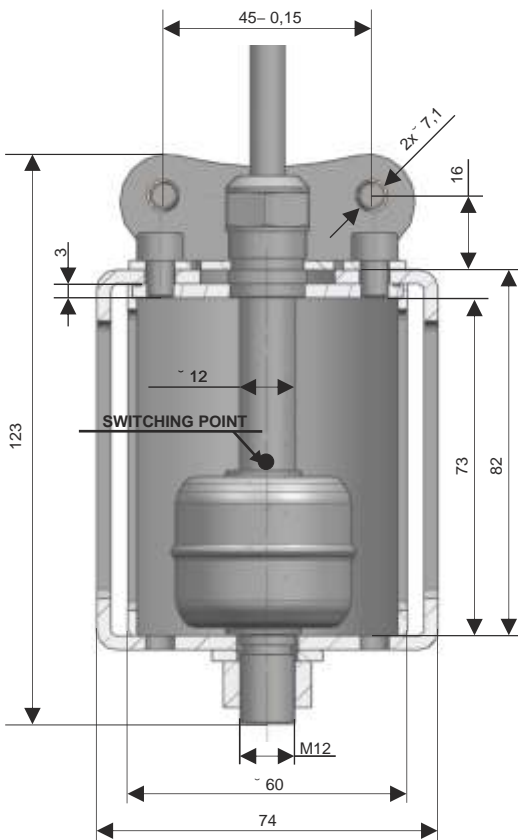

Fixing by means of 2" clamp

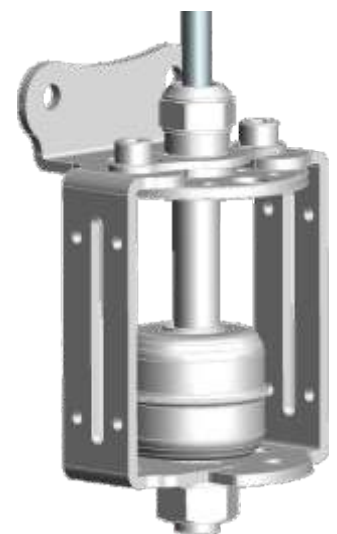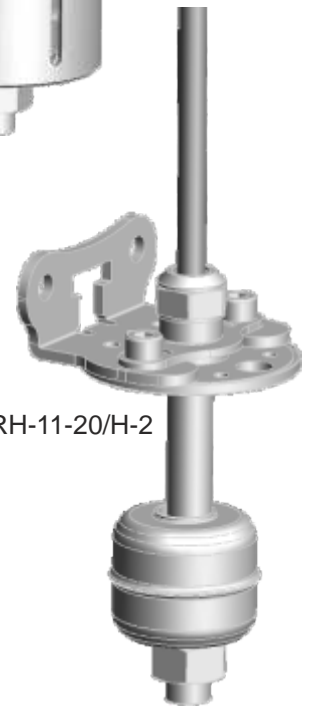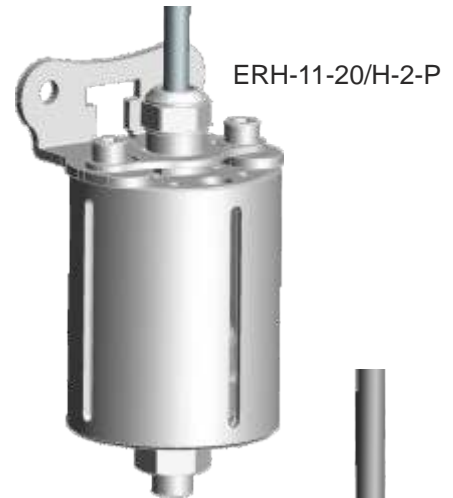

## Ordering

<b>ERH-02-20</b>	Level switch with flange connector □92mm (4 holes 14/ 92mm)	
<b>ERH-04-20</b>	Level switch with flange connector 120 (6 holes 12/ 100mm)	
<b>ERH-06-20</b>	Level switch with flange connector DN80 PN40 (8 holes 18/ 160mm)	
<b>ERH-09-20</b>	Level switch with threaded connector 2" NPT	
<b>ERH-XX-20</b>	Level switch with connector according to the order	
	<b>/A/0/0</b>	1 switching point (give value A in mm) *
	<b>/A/B/0</b>	2 switching points (give values A and B in mm) *
	<b>/A/B/C</b>	3 switching points (give values A, B and C in mm) *
	<b>-1</b>	Electric connector cable gland IP68 - <b>not available for Ex</b>
	<b>-2</b>	Electric connector cable gland IP68 with cable 3m length ** - <b>not available for Ex</b>
	<b>-3</b>	Electric connector ER2-1593 with cable 3m length ** - <b>not available for Ex</b>
	<b>-4</b>	Electric connector cable gland IP68 ATEX Ex D IIC
	<b>-5</b>	Electric connector without cable gland (thread M20x1,5)
	<b>Additional options of version</b>	
	<b>-K</b>	Fully acidproof steel version ***
	<b>-P</b>	With protection of float - <b>not available for Ex</b>
	<b>-T</b>	With Pt100 sensor - <b>not available for Ex</b>
	<b>-PT</b>	With Pt100 sensor and protection of float - <b>not available for Ex</b>
	<b>-KP</b>	Fully acidproof steel version with protection of float ***
	<b>-KT</b>	Fully acidproof steel version with Pt100 sensor ***
	<b>-KPT</b>	Fully acidproof steel version with protection of float and Pt100 sensor ***
	<b>/Ex</b>	Explosion-proof version  II 2G Ex db IIC T3÷T6 Gb
<b>ERH-11-20</b>	Level switch with mounting clamp (mini version - fully acidproof steel)	
	<b>/H</b>	1 switching point approximately in the middle of tube length
	<b>-2</b>	Electric connector with cable 3m **
	<b>Additional options of version</b>	
	<b>-Y</b>	With yoke / shackle
	<b>-P</b>	With protection of float
	<b>-YP</b>	With yoke/shackle and protection of float

\* the dimensions A, B and C depend on the ordered version; for one signalling point: A min. 50mm, A max. 1000mm; for two signalling points: A min. 150mm, A max 1000mm; B min. 50mm, B max 900mm; (A – B) min. 100mm; for three signalling points: A min. 250mm, A max 1000mm; B min. 150mm, B max 900mm; C min. 50mm, C max 800mm; (A – B) min. 100mm, (B – C) min. 100mm;

**range above 1000mm and 4 switching points on request**

\*\* other lengths of cable upon the order

\*\*\* for controllers designed for operation in full submersion - we recommend fully acidproof steel versions

### Example of the level switch denotation

Magnetic level switch with flange connector 120 (6 holes 12/ 100mm), one switch point A=200mm, electric connector IP68 with cable 3m length, fully acidproof steel version with protection tube of float

**ERH-04-20/200/0/0-2-KP**